

# TK-EVO





# TK-EVO

Move heavy loads without cords and hazardous exhaust fumes! It is great for use on special flooring including clean rooms, healthcare facilities, microchip and manufacturing plants and more!



## POWERED 3-POINT MOVING


The TK-EVO can be used in a 3 point configuration with a pair of rear dollies for easy and safe moving. The TK-EVO can also be used in combination with our other products such as omni-skates which allow for 360 degree rotation.

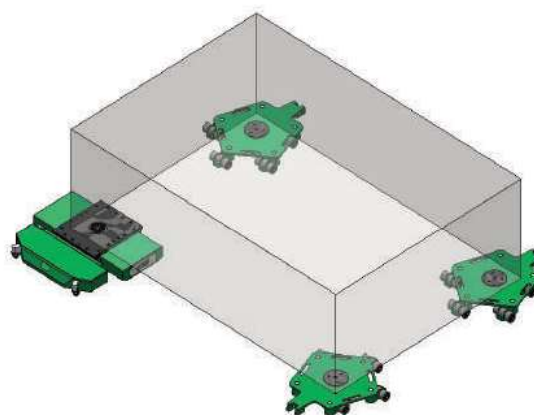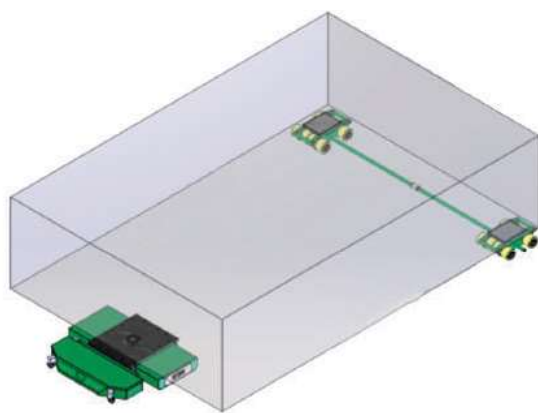

\*Images are for representation purposes only. Actual product configuration and support points will differ based on the load.

# FEATURES

Typical battery life under working conditions is up to 2 hours. Charge time per battery is up to 3 hours with standard 110V single phase outlet.

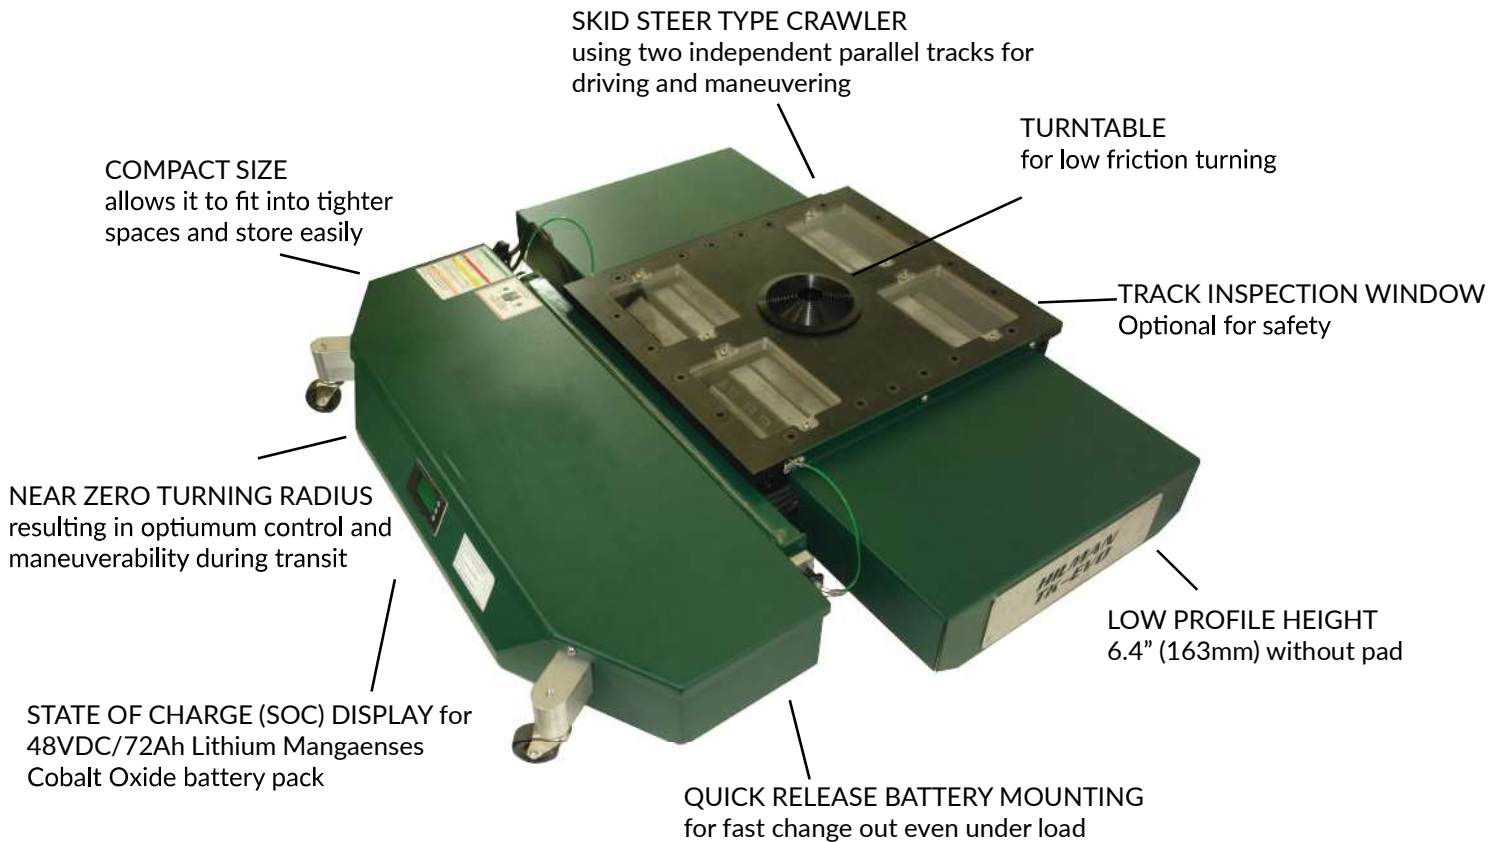

Dimensions	
Length	41" (1041mm)
Width	36" (914mm)
Height	6.4" (163mm) without pad
Capacity*	
Crawler Only	20 tonne (44,100 lb)
Trailer Only	20 tonne (44,100 lb)
Combined Load	40 tonne (88,200 lb)

\*Based on flat level riding surface

# BENEFITS



## NO CORDS. NO EMISSIONS

- No cords eliminate tripping hazards for crew members
- No hazardous exhaust fumes from a IC engine to limit areas for operation
- Quiet operation eliminates the need for ear protection while improving crew communication

## PERFORMANCE

- 2 Speed settings with proportional control forward and reverse
  - o High Speed: 12 fpm
  - o Low Speed 8 fpm
- Near zero crawler turning radius
- 48VDC/60Ah with State of Charge (SOC) display
  - o Expected Run Time: > 120 minutes
  - o Recharge Time: < 3 hours with standard 110V single phase outlet



## CUSTOM SOLUTION

The TK-EVO can be customized to meet the needs of a specific project. Inspection windows can be added for safety. It can also be combined with other product to make a complete custom moving solution.



# PACKAGES

The TK-EVO is offered in a basic package that includes (1) TK-40E with battery and charger and more!



## BASIC PACKAGE


Includes:

- (1) TK-EVO Crawler with Battery
- (1) Remote Control
- (1) Spare 48VDC/60Ah Battery
- (1) Battery Charger
- (2) 10 Ton Capacity Dollies
- (1) 8 ft Alignment Bar
- (4) Preload Pads

Training is also included with this package (8 hours max and includes no more than 4 groups-max 8 people per group). For more information please contact us.

## CUSTOM OPTIONS

Custom options are available for your specific application including track inspection windows, attachments, turtlebacks and turntables, and rear dolly modifications.

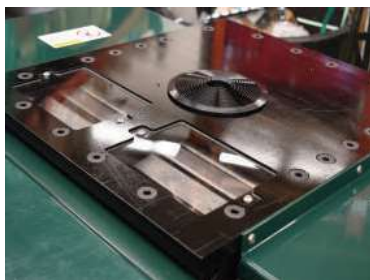



**HILMAN INC.**  
**12 Timber Lane**  
**Marlboro, New Jersey 07746**  
**USA**  
**Phone: +1-732-462-6277**  
**E-mail: [sales@hilmanrollers.com](mailto:sales@hilmanrollers.com)**  
**Website: [www.hilmanrollers.com](http://www.hilmanrollers.com)**

**ISO 9001**